


100/155Mbps 1550nm 80km SFP Single-Mode Optical Transceiver SFP-1M55-80-xx

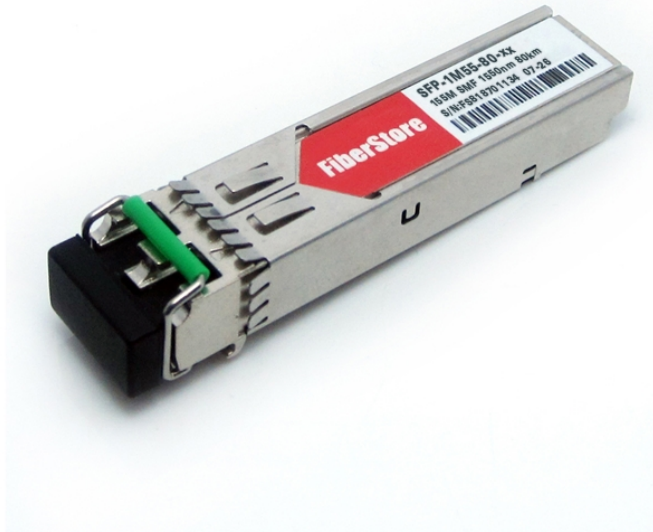

Features

- Data-rate of 155Mbps operation
- 80km with 9/125 μ m SMF
- Hot-pluggable SFP footprint duplex LC connector Interface
- Class 1 FDA and IEC60825-1 Laser Safety Compliant
- Digital Diagnostic Monitoring with SFF-8472
- Compatible with SFP MSA
- Compatible with SFF-8472
- +3.3V single power supply
- Operating case temperature
Standard : 0°C to +70°C
Extended: -20°C to +85°C
Industrial: -40°C to +85°C

Applications

- SDH/ SONET
- Fast Ethernet
- Other Optical Links
- ATM Switches and Routers

Description

The SFP transceivers are high performance, cost effective modules supporting dual data-rate of 155Mbps and 80km transmission distance with SMF.

The transceiver consists of three sections: a DFB laser transmitter, a PIN photodiode integrated with a trans-impedance preamplifier (TIA) and MCU control unit. All modules satisfy class I laser safety requirements. The transceivers are compatible with SFP Multi-Source Agreement (MSA) and SFF-8472. For further information, please refer to SFP MSA.

Specifications

Table 1 - Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage	V _{cc}	-0.5	4.5	V
Storage Temperature	T _s	-40	+85	°C
Operating Humidity	-		95	%

Table 2 - Recommended Operating Conditions


Parameter		Symbol	Min	Typical	Max	Unit
Operating Case Temperature	Standard	T _c	0		+70	°C
	Industrial		-40		+85	°C
Power Supply Voltage		V _{cc}	3.15	3.3	3.45	V
Power Supply Current		I _{cc}			300	mA
Data Rate	Gigabit Ethernet			155		Mbps
	Fiber Channel			100		

Table 3- Optical and Electrical Characteristics


Parameter	Symbol	Min	Typical	Max	Unit	Notes
9µm Core Diameter SMF	L		80		km	
Data Rate		\	100/155		Mbps	
Transmitter						
Centre Wavelength	λ _c	1480	1550	1580	nm	
Spectral Width (RMS)	Δλ			1	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
Average Output Power	P _{out}	-5		0	dBm	1
Extinction Ratio	ER	10			dB	2
Optical Rise/Fall Time (20%~80%)	tr/tf			2	ns	
Output Optical Eye	Compliant with IUT-T G.957					2,5
Total Jitter	TJ			1	ns	
TX Disable Assert Time	t _{off}			10	us	
Receiver						
Centre Wavelength	λ _c	1260		1600	nm	
Receiver Sensitivity	P _{min}			-34	dBm	4
Receiver Overload	P _{max}	-10			dBm	
LOS De-Assert	LOS _D			-35	dBm	
LOS Assert	LOS _A	-45			dBm	
LOS Hysteresis		0.5			dB	5

Notes:



- 1: Output is coupled into a 9/125 μ m single-mode fiber.
- 2: Filtered, measured with a PRBS 2^7-1 test pattern @1.25Gbps
- 3: LVPECL logic, internally AC coupled. LVPECL logic, internally AC coupled.
- 4: Minimum average optical power measured at BER less than $1E-12$, with a 2^7-1 NRZ PRBS and ER=9dB.
- 5: Eye Pattern Mask 6: LOS Hysteresis

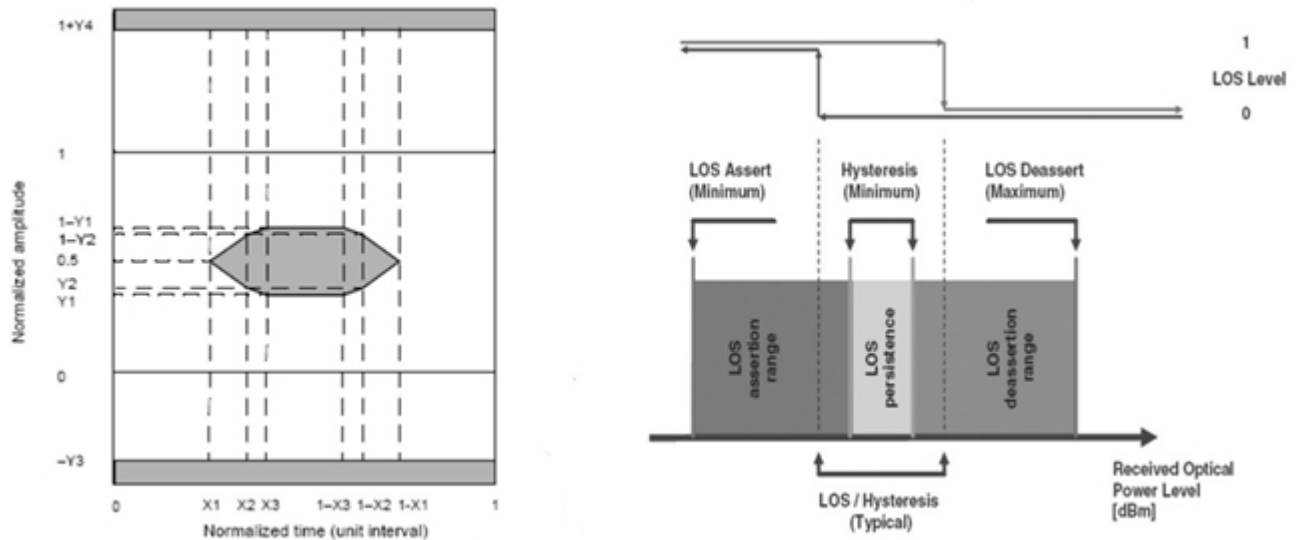

Functional Description of Transceiver

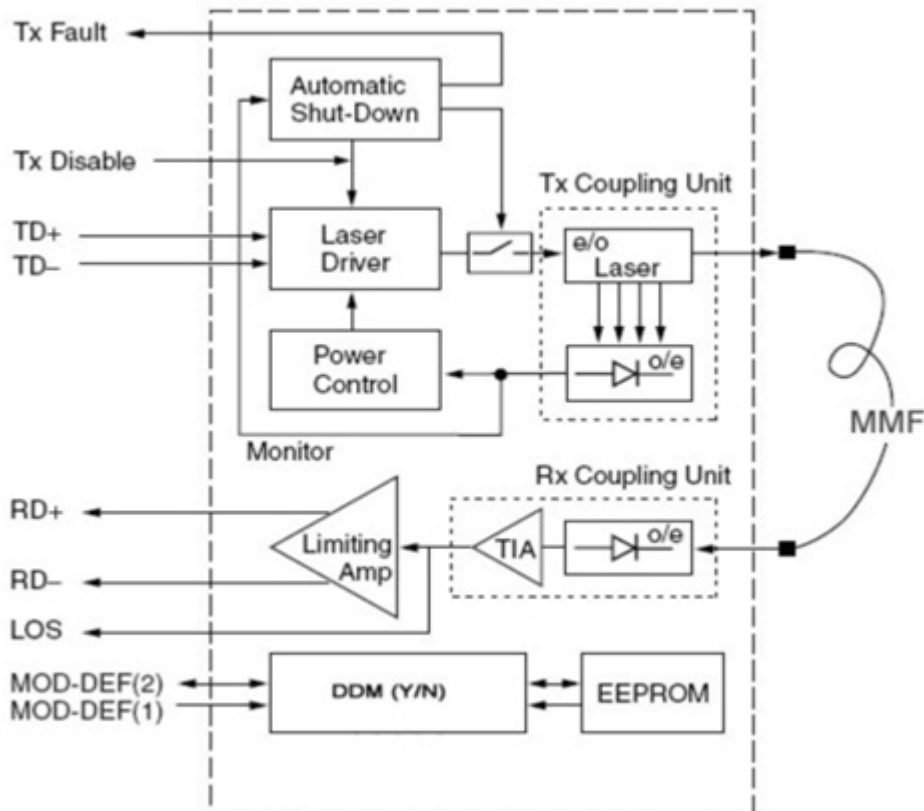

SFP Transceiver Electrical Pad Layout

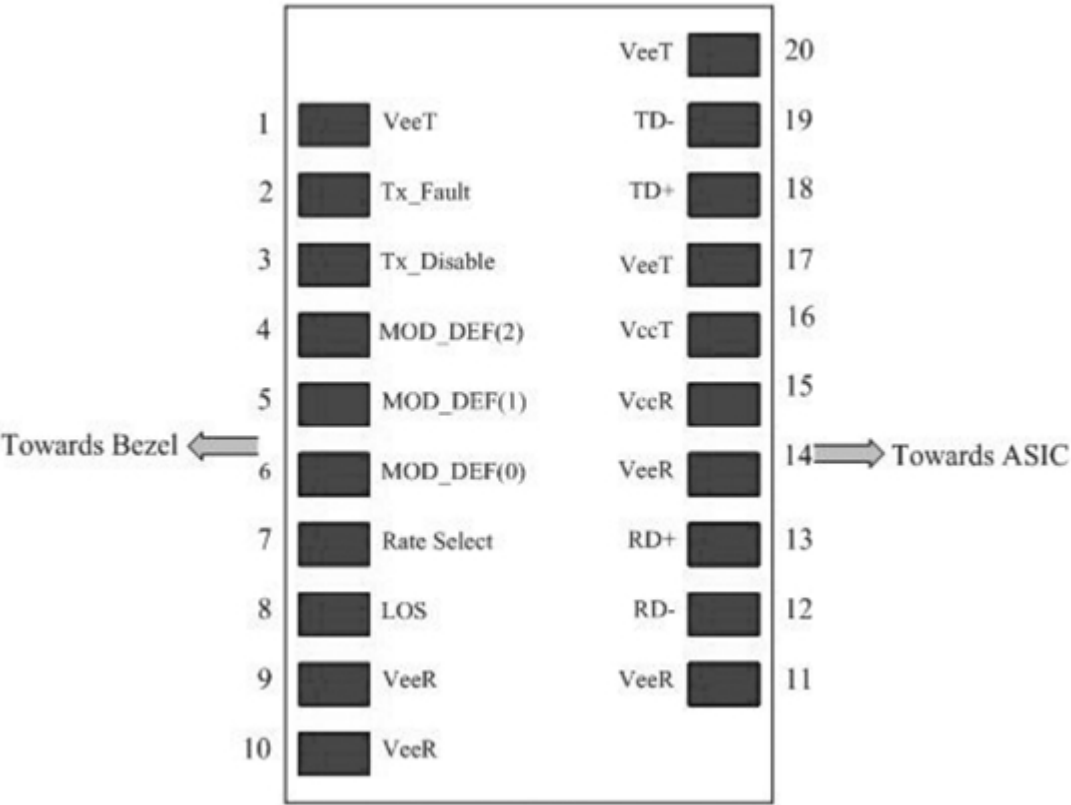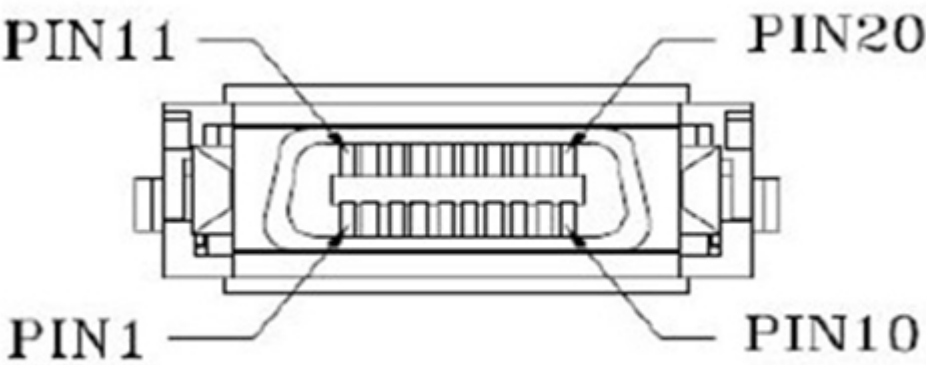

Pin Descriptions

Pin	Signal Name	Description	Plug Seq.	Notes
1	V _{EET}	Transmitter Ground	1	
2	TX FAULT	Transmitter Fault Indication	3	Note 1
3	TX DISABLE	Transmitter Disable	3	Note 2
4	MOD_DEF(2)	SDA Serial Data Signal	3	Note 3
5	MOD_DEF(1)	SCL Serial Clock Signal	3	Note 3
6	MOD_DEF(0)	TTL Low	3	Note 3
7	Rate Select	Not Connected	3	
8	LOS	Loss of Signal	3	Note 4
9	V _{EER}	Receiver ground	1	
10	V _{EER}	Receiver ground	1	
11	V _{EER}	Receiver ground	1	
12	RD-	Inv. Received Data Out	3	Note 5
13	RD+	Received Data Out	3	Note 5
14	V _{EER}	Receiver ground	1	
15	V _{CCR}	Receiver Power Supply	2	
16	V _{CCT}	Transmitter Power Supply	2	
17	V _{EET}	Transmitter Ground	1	
18	TD+	Transmit Data In	3	Note 6
19	TD-	Inv. Transmit Data In	3	Note 6
20	V _{EET}	Transmitter Ground	1	

Notes:

Plug Seq.: Pin engagement sequence during hot plugging.


- 1) TX Fault is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage between 2.0V and Vcc+0.3V. Logic 0 indicates normal operation; Logic 1 indicates a laser fault of some kind. In the low state, the output will be pulled to less than 0.8V.
- 2) TX Disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7k~10kΩ resistor. Its states are:

Low (0 to 0.8V):	Transmitter on
(>0.8V, < 2.0V):	Undefined
High (2.0 to 3.465V):	Transmitter Disabled
Open:	Transmitter Disabled
- 3) Mod-Def 0, 1, 2. These are the module definition pins. They should be pulled up with a 4.7k~10kΩ resistor on the host board. The pull-up voltage shall be VccT or VccR.

Mod-Def 0 is grounded by the module to indicate that the module is present

Mod-Def 1 is the clock line of two wire serial interface for serial ID

Mod-Def 2 is the data line of two wire serial interface for serial ID
- 4) LOS is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor. Pull up voltage between 2.0V and Vcc+0.3V. Logic 1 indicates loss of signal; Logic 0 indicates normal operation. In the low state, the output will be pulled to less than 0.8V.
- 5) RD-/+: These are the differential receiver outputs. They are internally AC-coupled 100 differential lines which should be terminated with 100Ω (differential) at the user SERDES.
- 6) TD-/+: These are the differential transmitter inputs. They are internally AC-coupled, differential lines with 100Ω differential termination inside the module.

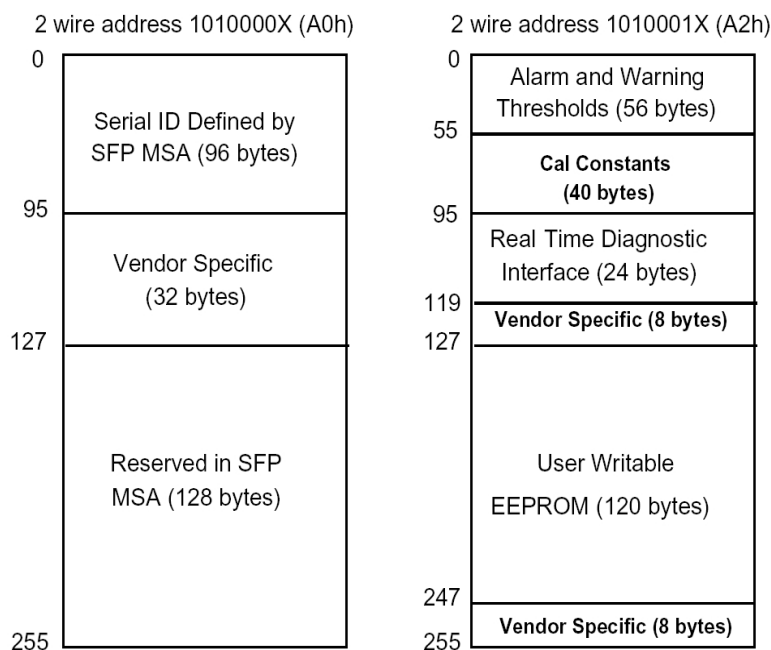


EPROM Serial ID Memory Contents

Add.	Size (Bytes)	Name of Field	Hex	Description
BASE ID FIELDS				
0	1	Identifier	03	SFP
1	1	Ext. Identifier	04	SFP function is defined by serial ID only
2	1	Connector	07	LC Connector
3-10	8	Transceiver	00 00 XX 00 00 00 00 00	OC 3, Single mode inter. Or long reach
11	1	Encoding	03	NRZ
12	1	BR, Nominal	02	155Mbps
13	1	Reserved	00	Transceiver Transmit Distance
14	1	Length (9μm) km	XX (0F 50/64/78/A0)	
15	1	Length(9μm) 100m	XX (96/FF/FF/FF/FF)	
16	1	Length (50μm) 10m	00	
17	1	Length(62.5μm)10m	00	
18	1	Length (Copper)	00	Not Compliant
19	1	Reserved	00	
20-35	16	Vendor name	XX XX XX XX XX XX XX XX ^(note) 20 20 20 20 20 20 20 20	Vendor name (ASCII)
36	1	Reserved	00	
37-39	3	Vendor OUI	XX XX XX ^(note)	


40-35	16	Vendor PN	XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX ^(note)	Vendor part number
56-59	4	Vendor rev	XX XX XX XX ^(note)	
60-61	2	Wavelength	06 0E	1550nm
62	1	Reserved	00	
63	1	CC_BASE	Check Sum (Variable)	Check Code for Base ID Fields
EXTENDED ID FIELDS				
64-65	2	Options	00 1A	TX_DISABLE, TX_FAULT and Loss of Signal implemented.
66	1	BR, max	00	
67	1	BR, min	00	
68-83	16	Vendor SN	XX XX XX XX XX XX XX XX ^(note) 20 20 20 20 20 20 20 20	Serial Number of transceiver (ASCII). For example "B000822".
84-91	8	Date Code	XX XX XX XX XX XX XX XX ^(note)	Manufactory Date Code. For example "080405"
92	1	Diagnostic Monitoring Type	XX ^(note)	Digital Diagnostic Monitoring Implemented
93	1	Enhanced Options	XX ^(note)	Optional Flags
94	1	SFF_8472 Compliance	XX ^(note)	01 for Rev9.3 SFF-8472
95	1	CC_EXT	Check Sum (Variable)	Check Sum for Extended ID Field
VENDOR SPECIFIC ID FIELDS				
96-127	32	Vendor Specific	Read Only	Depends on Customer Information
128-255	128	Reserved	Read Only	

Note: The "XX" byte should be filled in according to practical case. For more information, please refer to the related document of SFP Multi-Source Agreement (MSA).

Recommended Interface Circuit

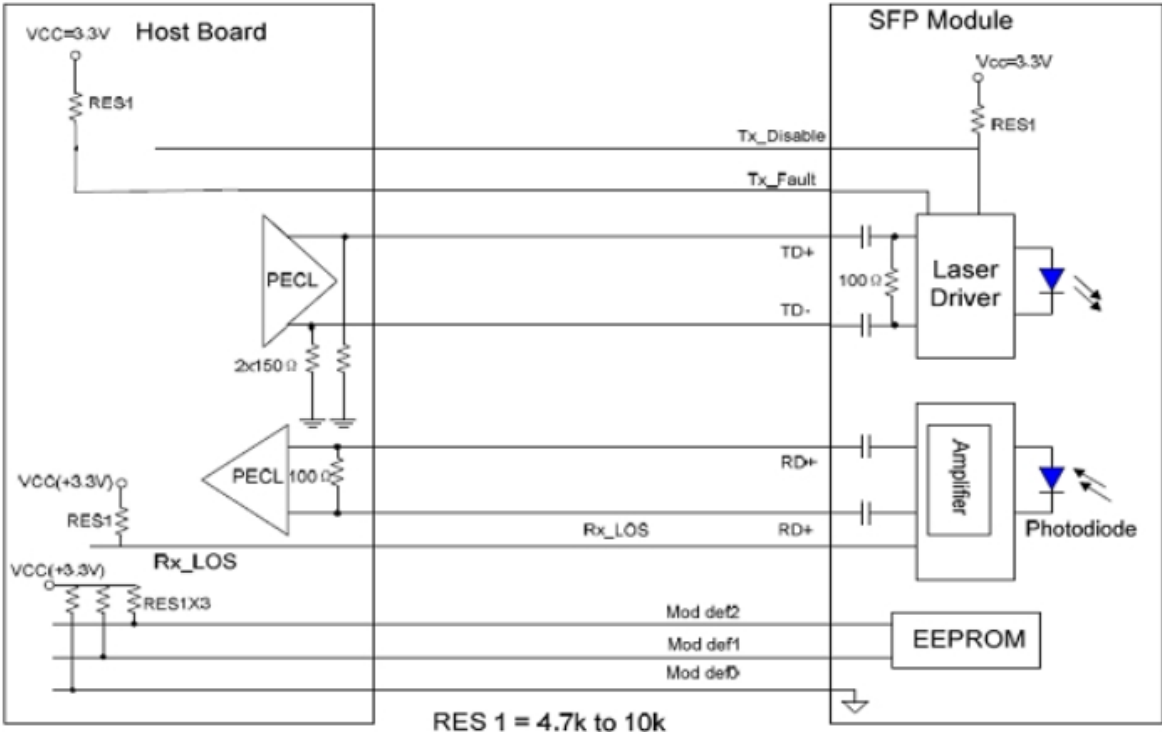

Mechanical Dimensions

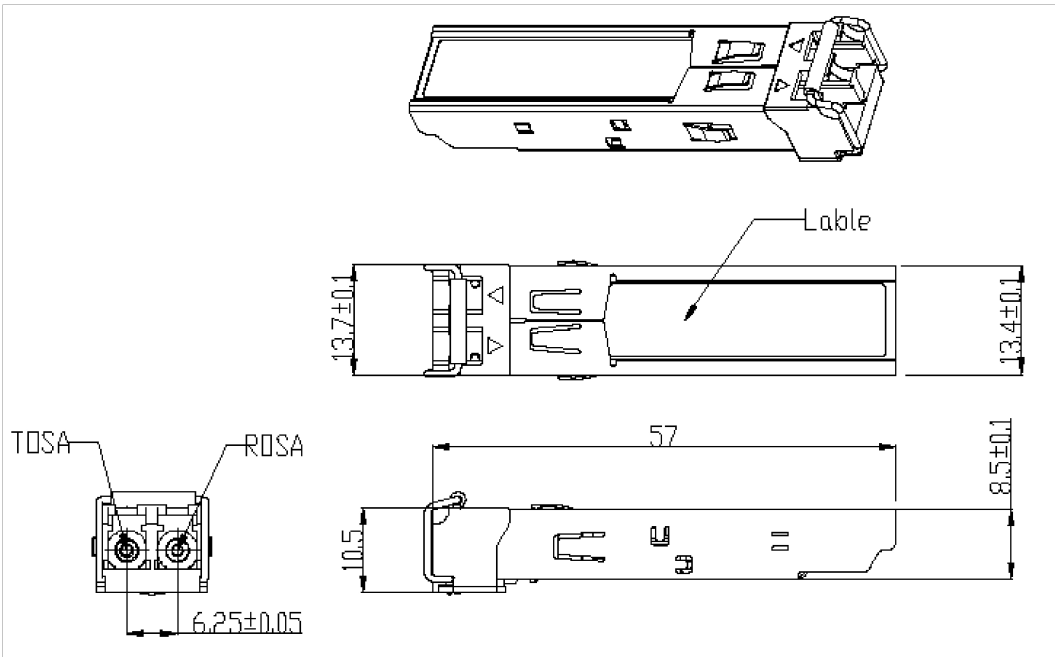

Ordering Information

Part No.	Data Rate (Mbps)	Wavelength (nm)	Connector Type	Transmission Distance (km)	Operating case temperature (°C)	Digital Diagnostics
SFP-1M55-80-xx	155	1550	LC	80	0 to +70	No
SFP-1M55-80D-xx	155	1550	LC	80	0 to +70	Yes
SFP-1M55-80E-xx	155	1550	LC	80	-20 to +85	No
SFP-1M55-80ED-xx	155	1550	LC	80	-20 to +85	Yes
SFP-1M55-80I-xx	155	1550	LC	80	-40 to +85	No
SFP-1M55-80ID-xx	155	1550	LC	80	-40 to +85	Yes

Notes:

xx means compatible brand. (For example: CO= Cisco, JU=Juniper, FD=Foundry, EX=Extreme, NE=Netgear.)

FiberStore U.S.

X205 4181 129th Place SE, Bellevue
98006, WA,
United States
Tel: +1 (206) 453 0158
Fax: +1 (425) 505 2761

FiberStore Hong Kong

1220 Tung Chun Commercial Centre,
438-444 Shanghai Street, Kowloon,
HongKong
Tel: (852) 8120 3582
Fax: (852) 8120 3582

FiberStore China

5D Intelligent Tower,
Fumin Road Futian,
Shenzhen 518045, GuangDong,
China
Tel: +86 (755) 8300 3611
Fax: +86 (755) 8326 9395

Addresses, phone number and fax number also have been listed at www.fiberstore.com. Please e-mail us at sales@fiberstore.com or call us for assistance.

All statements, technical information, and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. Please contact FiberStore for more information.